

Your Area Distributor:

Pee Vee Enterprises

(An ISO 9001 : 2008 Certified Co.)



FASTENERS SOLUTIONS

ANSI | ASTM | DIN | ISO | JIS | BS



Fasteners Solutions
PASSION WITH VISION

Pee Vee Enterprises

27, Manohar Market, Peepal Mahadev Street, Hauz Qazi, Delhi-110006 (INDIA),
Ph. 91-11-23274568, 23242039, Fax. 91-11-23274568,
e mail : pvent11@gmail.com , sales@pvfastener.com
Website : www.pvfastener.com



Fasteners Solutions
PASSION WITH VISION

The busy and competitive scenario of today's commercial world has constrained the time factor and has increased the value of grips. Taking this factor into consideration, Pee Vee Enterprises introduce the

FASTENERS SOLUTIONS under one roof with our solutions for industry are genuinely made - to - measure.

Daily, PEE VEE ENTERPRISES faces a wide range of challenges in the technical, quality and logistics fields. Dealing with these challenges drives company growth and continues to expand our expertise. Customers can enjoy the benefits of this expertise built up over the years

That's why we are glad to introduce ourselves **PEE VEE ENTERPRISES** as one of the whole sales traders & manufacturing organization involved in supply & produce of wide range of high quality of industrial fasteners and their related products since 1979 with experience. Business connections have been set up with satisfied customers with our :-

CORE VALUES

CUSTOMER FOCUS – We drive maximum autonomy closest to the market, focus on satisfying the Real needs of our customers. We understand their problem and solve them.

VALUE – Our uniqueness stems from transforming commodities into customized services by thinking and acting along the entire value added chain. For the comprehensive service we request an adequate premium. Therefore Pee Vee Enterprises will never be cheap but must always provide the best value.

QUALITY – All our stakeholders can depend on us, that we do what we agree to. Our total commitment to quality and continuous improvement provides for the economy, comfort and security of our customers.

PEOPLE – Our core strength is our people, we endeavor to create the “winning team”: driven by our core values, thriving in a climate for action, with ample capabilities for success, and above all an overwhelming commitment for results.

GOAL - Always to seek better performance. Forget the Future!

EQUITY – Treat the equal equal and the unequal unequal.

POLICY – Most economically and without any quality essels, we are interested in supply only quality products with best possible service and we make sure you have an experience that stays with us forever

LEADERSHIP – Mind: We encourage creativity and innovation.

ACTION - We do what we feel right to do, even the unconventional.

FINANCIAL - We want to have ample “water under the keel” to move freely and securely even in troubled waters.

P.V. Enterprises has strict quality control products, have won good reputation by offering the best service, quantity and delivery on time.

PV means Passion with Vision.

SOCKET HEAD CAP SCREW

STANDARDS : DIN 912, ISO 4762, IS 2269
DIAMETER : 2mm to 48mm, 1/8" to 1.1/2"
LENGTH : 5mm to 400mm, 3/8" to 12"
GRADES : 8.8, 10.9, 12.9, A2, A4
FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation




SOCKET COUNTER SUNK SCREW

STANDARDS : DIN 7991, IS 6761, BS 4168
DIAMETER : 3mm to 24mm, 1/4" to 1"
LENGTH : 5mm to 150mm, 3/8" to 4"
GRADES : 8.8, 10.9, 12.9, A2, A4
FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation



SOCKET BUTTON HEAD SCREW

STANDARDS : ISO 7380, DIN 9427, BS 4168
DIAMETER : 3mm to 12mm, 5/16" to 3/8"
LENGTH : 5mm to 50mm, 3/8" to 1"
GRADES : 8.8, 10.9, 12.9, A2, A4
FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation

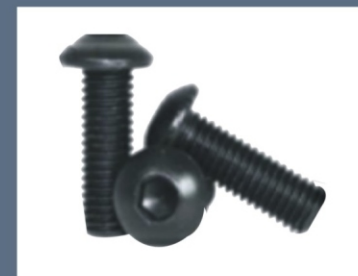

SOCKET SET SCREW

STANDARDS : DIN 913, 914, 915 & 916
DIAMETER : 3mm to 20mm, 3/16" to 3/4"
LENGTH : 3mm to 100mm, 3/16" to 2"
GRADES : 8.8, 10.9, 12.9, A2, A4
FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation





HEX HEAD SCREWS & BOLTS

STANDARDS : DIN 931/933, ISO 4014/4017
 DIAMETER : 4mm to 52mm , 1/8" to 1.1/2"
 LENGTH : 5mm to 400mm, 3/8" to 12"
 GRADES : 8.8, 10.9, 12.9, A2, A4
 FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation



FLANGE HEAD SCREW & BOLTS

STANDARDS : DIN 6921
 DIAMETER : 6mm to 16mm
 LENGTH : 10mm to 50mm
 GRADES : 8.8, 10.9, 12.9, A2, A4
 FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation



FULL THREADED STUD & RODS

STANDARDS : DIN 975, 976, A193
 DIAMETER : 12mm to 48mm , 1/2" to 1.1/2"
 LENGTH : 50mm to 2mtr. 2" to 6'
 GRADES : 8.8, 10.9, 12.9, A2, A4
 FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation




HALF THREADED STUDS

STANDARDS : DIN 939 & DIN 985
 DIAMETER : 6mm to 52mm , 1/4" to 2"
 LENGTH : 25mm to 400mm, 1" to 12"
 GRADES : 8.8, 10.9, 12.9, A2, A4
 FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation


HEX NUTS

STANDARDS : DIN 934, ISO 4032, IS 1364, BS 1083 /1768, A194
 DIAMETER : 3mm to 100mm , 1/4" to 2"
 GRADES : cl 6, cl 8, cl 10, 2H, A2, A4
 FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation

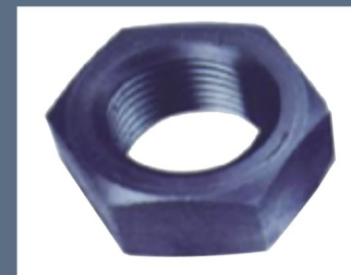

NYLOCK NUTS

STANDARDS : DIN 982/985, ISO 7040
 DIAMETER : 3mm to 48mm , 1/4" to 1.1/2"
 GRADES : cl 6, cl 8, cl 10, 2H, A2, A4
 FINISH : Zinc Blue, Yellow Passivation

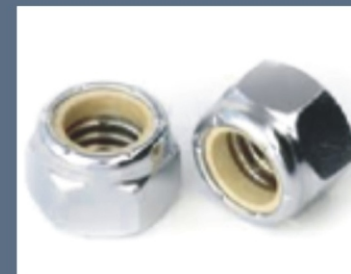

FLANGE NUTS

STANDARDS : DIN 6923
 DIAMETER : 4mm to 20mm
 GRADES : cl 6, cl 8, cl 10, 2H, A2, A4
 FINISH : Zinc Blue, Yellow Passivation



SLOTTED & CASTLE NUTS

STANDARDS : DIN 935
 DIAMETER : 6mm to 48mm , 3/8" to 1.1/2"
 GRADES : cl 6, cl 8, cl 10, 2H, A2, A4
 FINISH : Black, Zinc Blue, Hot dip, Decromate, Yellow Passivation





WIRE THREAD REPAIR KIT

RANGE : M2 to M36 & 1/8" to 1.1/2"
 CONTENTS : M2-M12 (1/8" - 1/2") Kits include Drill, STI Tap, Inserts Installation Tool & Tang breaker. Above size not include drill & Tang Breaker.



WIRE THREAD INSERTS

RANGE : M2 to M36 & 1/8" to 1.1/2"
 MATERIAL : SS 304, INCONEL X750, NITRONIC 60 PHOSPHOR BRONZE, TITANIUM.
 FINISH : Silver Plating, Cadmium Plating, Primer Free, Color Coding, Dry Film Lubricant., SS self.
 TYPE : Free Running & Screw Locking



WIRE THREAD INSTALLATION TOOL

RANGE : M2 to M36 & 1/8" to 1.1/2"
 TYPE : Hand Installation Tool, Prewinder Installation Tool, Machine Installation Tool, Hex Drive Installation Mandrel, Pneumatic Installation Tool



HSS STI THREADED TAPS

RANGE : M2 to M36 & 1/8" to 1.1/2"
 TYPE : HSS STI Roughing Tap
 HSS STI Intermediate Tap
 HSS STI Bottoming Tap
 HSS STI Spiral Flute Tap
 HSS STI Spiral Point Tap

REDUCE DIAMETER INSERTS

RANGE : M4 to M24 & 1/8" to 1.1/2"
 TYPE : Thin Wall, Heavy Duty & Screw Locking
 MATERIAL : Carbon Steel & Stainless Steel



SELF TAPPING INSERTS

STANDARDS : Ensart Type 302, 307, 308, 317, 318, 337 & 338
 DIAMETER : 2mm to 30mm, #4 to 5/8" UNF & UNC Threads
 MATERIAL : Unhardened steel, Case-hardened Steel, Brass, Rust proof steel.
 FINISH : Zinc-plated, Yellow chromate, Stainless Steel.




HSS BROKEN SCREW EXTRACTOR

CONTENTS : 5pcs. High-speed LEFT-HAND Cobalt Drill bits. 5/16", 7/64", 5/32", 1/4", 19/64" Included
 DIAMETER : #1, 2, 3, 4, 5
 M3 - 4, 4 - 5, 5 - 7, 7 - 9, 9 - 15mm
 3/32" - 5/32", 5/32" - 7/32", 7/32" - 9/32", 9/32" - 3/8" 3/8" - 5/8"



DOWEL & GROOVED PINS

STANDARDS : DIN 6325, 7979, 7978, 258, 7977, 1469, 1470, 1471, 1472, 1473, 1474, 1475, 1476, 1477, BN 890
 DIAMETER : 1.5mm to 30mm
 MATERIAL : Steel, Hardened Steel & Free Cutting Steel
 FINISH : Self Finish

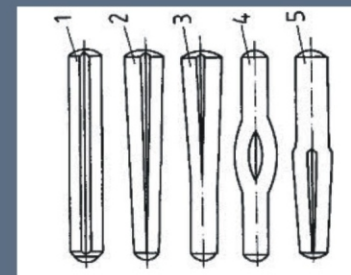



SPRING DOWEL PIN (HOLLOW TYPE)

STANDARDS : DIN 1481, 7346, ISO 13337, 8752
DIAMETER : 1.5mm to 36mm
MATERIAL : Heat Treated Spring Steel & Stainless Steel
FINISH : Black & Steel finish




SPIRAL LOCK PIN

STANDARDS : DIN 7343 & ISO 8750
DIAMETER : 4mm to 24mm
MATERIAL : Heat Treated Spring Steel & Stainless Steel
FINISH : Black & Steel finish



E - TYPE CIRCLIP

STANDARDS : DIN 6799
DIAMETER : 1.5mm to 30mm
MATERIAL : Spring Steel & Stainless steel
FINISH : Black & Stainless Steel Finish

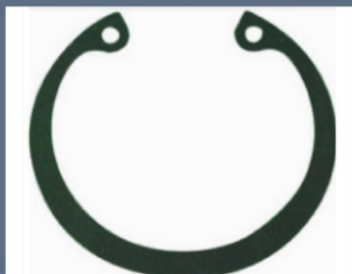

INTERNAL CIRCLIP

STANDARDS : DIN 472
DIAMETER : 8 mm to 300 mm
MATERIAL : Spring Steel & Stainless steel
FINISH : Black & Stainless Steel Finish

EXTERNAL CIRCLIP

STANDARDS : DIN 471
DIAMETER : 3 mm to 300 mm
MATERIAL : Spring Steel & Stainless steel
FINISH : Black & Stainless Steel Finish



DISC WASHERS

STANDARDS : DIN 2093
DIAMETER : 8 mm to 112 mm
MATERIAL : Spring Steel & Stainless steel
FINISH : Black & Stainless Steel Finish



WAVE WASHERS

STANDARDS : DIN 137
DIAMETER : 2.5 mm to 100 mm
MATERIAL : Spring Steel & Stainless steel
FINISH : Black & Stainless Steel Finish



HELICAL SPRING LOCK WASHER

STANDARDS : DIN 127 A & 127 B
DIAMETER : 3 mm to 42 mm
MATERIAL : Spring Steel & Stainless steel
FINISH : Black & Stainless Steel Finish





INTERNAL TOOTHED LOCK WASHER

STANDARDS : DIN 6797 FORME J
DIAMETER : 3 mm to 20 mm
MATERIAL : Spring Steel Heat Treated
FINISH : Black, Zinc Plated



EXTERNAL TOOTHED LOCK WASHER

STANDARDS : DIN 6797 FORME A
DIAMETER : 3 mm to 20 mm
MATERIAL : Spring Steel Heat Treated
FINISH : Black, Zinc Plated



QUICK LOCK WASHER

STANDARDS : BN 833
DIAMETER : 3 mm to 10 mm
MATERIAL : Spring Steel
FINISH : Black




TAPPER WASHERS

STANDARDS : DIN 435 & 434
DIAMETER : 12mm to 30mm , 1/2" to 1.1/2"
GRADES : Steel
FINISH : Black, Zinc Blue, Hot dip, Yellow Passivation

SQUARE WASHERS

STANDARDS : DIN 436
DIAMETER : 12mm to 22mm , 3/8" to 1.1/2"
GRADES : Steel
FINISH : Black, Zinc Blue, Hot dip, Yellow Passivation



PLAIN & FLAT WASHERS

STANDARDS : DIN 125A,B,433,9021,126,1440
DIAMETER : 6mm to 56mm , 3/8" to 2"
GRADES : Steel, Hardness Steel, A2, A4
FINISH : Black, Zinc Blue, Hot dip, Yellow Passivation



HEXAGONAL & TROX ALLEN KEYS

STANDARDS : DIN 911, 6911, ISO 2936, BS2470, IS 3082,
TROX Series & 'T' Type
DIAMETER : 1.5mm to 32mm , 1.1/6" to 3/4"
MATERIAL : High Grade Alloy Steel 47HRC
FINISH : Black Decromate, Yellow Passivation



LIFTING EYE BOLT

STANDARDS : DIN 580, ISO 3266
DIAMETER : 6mm to 100mm
MATERIAL : Steel C15
FINISH : Black, Zinc Blue,

